Acoustical Louver

Commercial Acoustics

5960 W. WASHINGTON ST.
PHOENIX, ARIZONA 85043-3523
(602) 233-2322 FAX 233-2033

A DIVISION OF METAL FORM MANUFACTURING

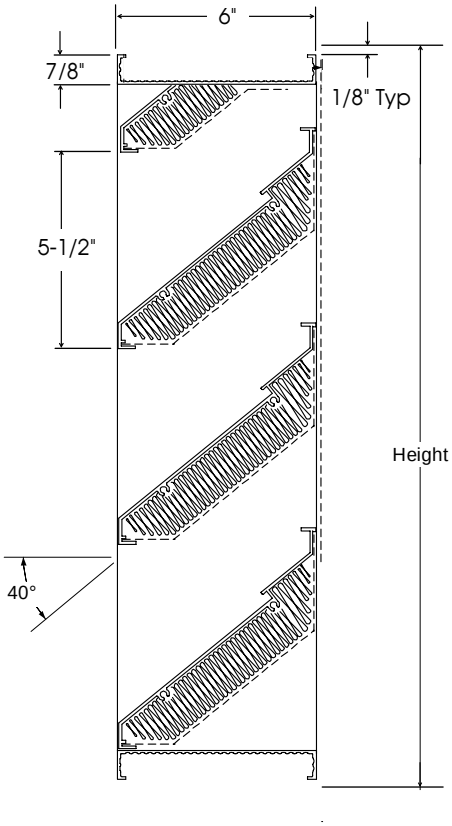

MFA-15A

Extruded Aluminum
40° Blade Stormproof, 6" DEPTH

SPECIFICATIONS

FRAME: .100 6063-T5 extruded aluminum
BLADES: .100 6063-T5 extruded aluminum
BLADE SPACING: 6" standard
FINISH: Mill finish standard
SOUND INSULATION: Glass fiber

SIZES

MINIMUM: 14" x 14"
MAXIMUM: Louvers larger than 72" wide x 96" tall are made in sections with mullions, making size unlimited.
DEPTH: 6" frame standard

OPTIONS

SCREEN: 1/2" x 1/2" 19 gauge galvanized mesh. Other size and material screens available.
FLANGE FRAME: See spec. sheet MFX-80-2 for specifications.
FINISH: Anodized:
A. Light Bronze
B. Medium Bronze
C. Dark Bronze
D. Black Bronze
E. Clear No. 204-R1
F. Clear No. 215-R1

Painted:
G. Prime Coat
H. Color Coat (see color chart)

Continuous Length: Louvers longer than 72" are available with concealed mullions.

PROJECT:

LOCATION:

ENGINEER:

CONTRACTOR:

REVISIONS:

ACOUSTIC PERFORMANCE

OCTAVE BAND	1	2	3	4	5	6	7	8
CENTER FREQUENCY. Hz	63	125	250	500	1K	2K	4K	8K
TL. dB	3	2	4	6	9	11	12	11
NR. dB	10	9	12	13	14	17	22	24

AERODYNAMIC PERFORMANCE

PRESSURE LOSS, iwg	.05	.15	.20	.35	.45	.60	.75	1.0
FACE VELOCITY, fpm	275	450	525	650	750	850	950	1100

NOTE: Louver will be supplied 1/4 inch smaller than width and height dimensions shown below.

QUANTITY	WALL OPENING		NO. OF SECTIONS	SILL TYPE	FINISH	REMARKS AND OPTIONS
	WIDTH	HEIGHT				

Copy Right 2010 Metal Form Mfg
Form No.CA-15A10