



METAL FORM MANUFACTURING CO., INC
 5960 WEST WASHINGTON STREET
 PHOENIX, ARIZONA 85043
 TELEPHONE: 602-233-1211 FAX: 602-233-2033
 WEBSITE ADDRESS: WWW.MFMCA.COM

Model MFL-23 Fabricated Stationary Louver 4" Deep Plain Blade

Specifications


- Frame:** 18ga. galvanized steel channel frame.
- Blades:** 18ga. galvanized steel.
- Screen:** 1/2" x 1/2" x 19ga. galvanized steel.
- Finish:** Standard mill.
- Minimum size:** 12" w x 12" h.
- Maximum size:** 72" w x 96" h.
Multiple section - unlimited size.

Options

- Flanged frame.
- Architectural mullions.
- Sill extension.
- Sleeves.
- Sub frame (requires flanged louver).
- Screens - Many variations of screens are available, consult factory.
- Finishes - Many types of finishes are available, consult factory.
- Other options available, consult factory.

Notes

1. Width x height are nominal opening dimensions. Unless specified otherwise, units will be constructed 1/4" undersize.
2. Metal Form reserves the right to improve design or change specifications at any time.

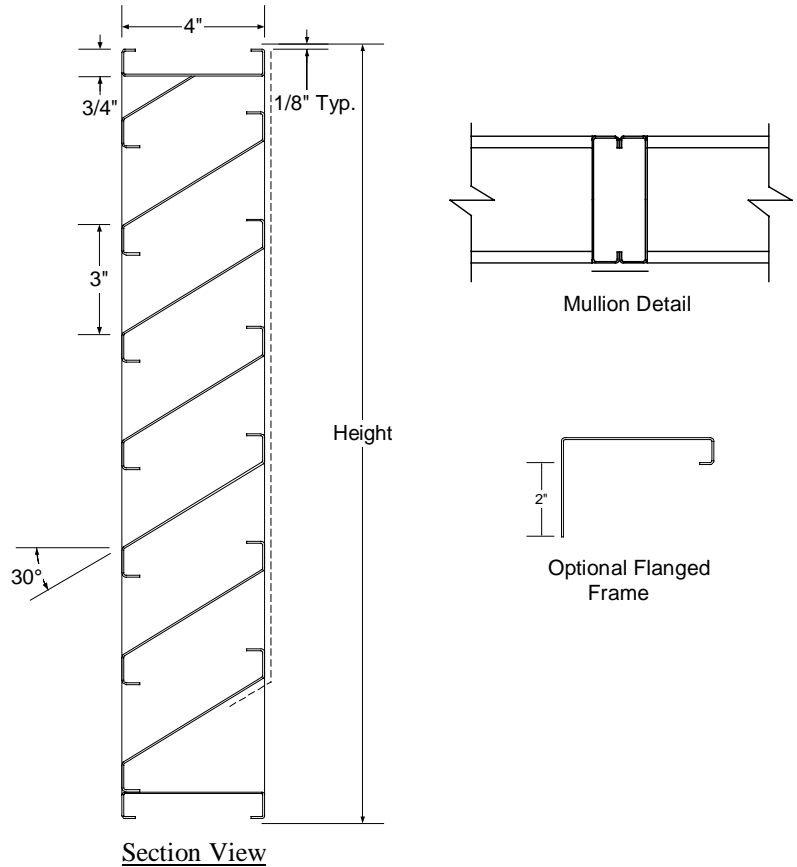


Tag	Qty.	Width	Height	No. of Panels (W x H)	Options	Finishes/Specify	Remarks

Project: _____
Architect: _____
Engineer: _____
Contractor: _____

©1998 Metal Form Manufacturing Co., Inc.
 Form No. L-2398

Refer to back page for performance data.

Model MFL-23 Performance Data

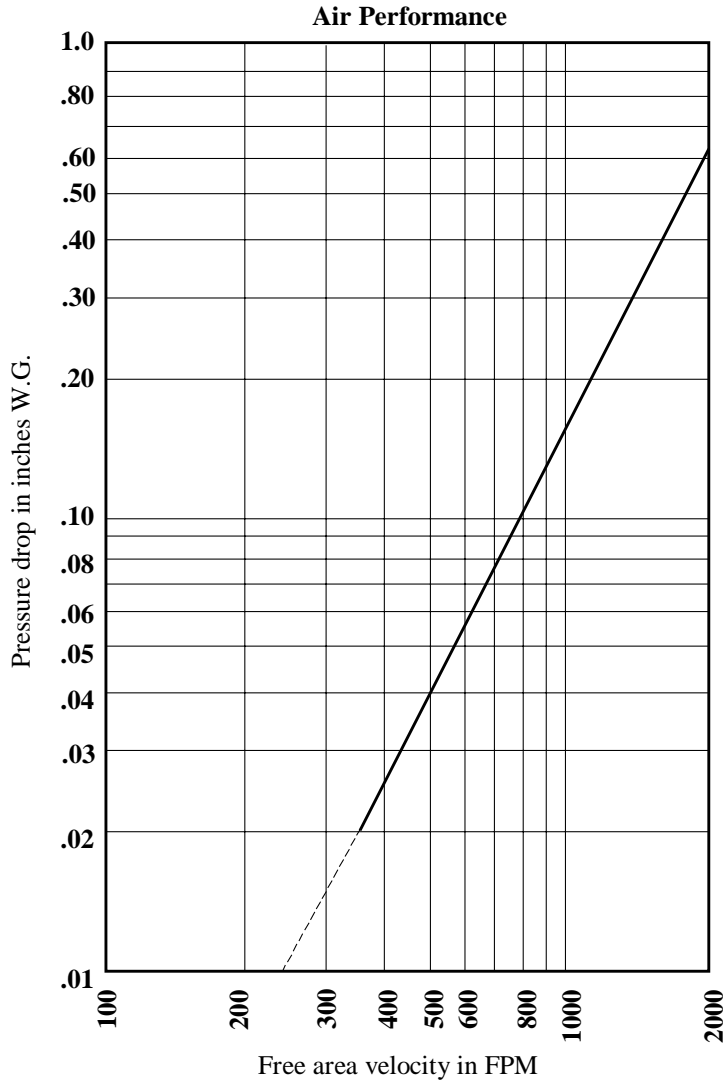

Test unit size 48" x 48"
Graph is corrected to standard air density .075 lbs. per cubic feet.
Ratings do not include the effects of a bird screen.

Free Area Chart - Sq. Ft.

Height	96	3.78	6.00	8.21	10.42	12.64	14.85	17.06	19.28	21.49	23.70	25.92
	90	3.53	5.60	7.67	9.74	11.80	13.87	15.94	18.01	20.07	22.14	24.21
	84	2.28	5.21	7.13	9.05	10.97	12.89	14.81	16.74	18.66	20.58	22.50
	78	3.03	4.81	6.59	8.36	10.14	11.91	13.69	15.47	17.24	19.02	20.79
	72	2.78	4.42	6.05	7.68	9.31	10.94	12.57	14.20	15.83	17.46	19.09
	66	2.54	4.02	5.50	6.99	8.47	9.96	11.44	12.93	14.41	15.90	17.38
	60	2.29	3.63	4.96	6.30	7.64	8.98	10.32	11.66	13.00	14.33	15.67
	54	2.04	3.23	4.42	5.62	6.81	8.00	9.19	10.39	11.58	12.77	13.96
	48	1.79	2.84	3.88	4.93	5.98	7.02	8.07	9.12	10.16	11.21	12.26
	42	1.54	2.44	3.34	4.24	5.14	6.04	6.95	7.85	8.75	9.65	10.55
	36	1.29	2.05	2.80	3.56	4.31	5.07	5.82	6.58	7.33	8.09	8.84
	30	1.04	1.65	2.26	2.87	3.48	4.09	4.70	5.31	5.92	6.53	7.13
	24	.79	1.26	1.72	2.18	2.65	3.11	3.57	4.04	4.50	4.96	5.43
18	.54	.86	1.18	1.50	1.81	2.13	2.45	2.77	3.08	3.40	3.72	
12	.29	.47	.64	.81	.98	1.15	1.32	1.50	1.67	1.84	2.01	
	12	18	24	30	36	42	48	54	60	66	72	
	Width											