METAL FORM MANUFACTURING CO., INC
5960 WEST WASHINGTON STREET
PHOENIX, ARIZONA 85043
TELEPHONE: 602-233-1211 FAX: 602-233-2033
WEBSITE ADDRESS: WWW.MFMCA.COM

Model MFS-42 Light Duty Shutter

Aluminum Blade

Specifications

Frame:	14ga. Galvanized steel hat channel.
Blades:	.025” Formed aluminum blades.
Bearings:	Brass inserts.
Axles:	3/16” Diameter plated steel.
Linkage:	Plated steel brackets, 1/2” x 1/8” aluminum tie bar, nylon ratchet fasteners.
Seals:	PVC.
Counterbalance:	As required for upflow applications.
Max. Velocity:	1500 FPM @ 1” w.g.
Minimum size:	6” x 6”
Maximum size:	32”w x 72”h. Multiple section - unlimited size.

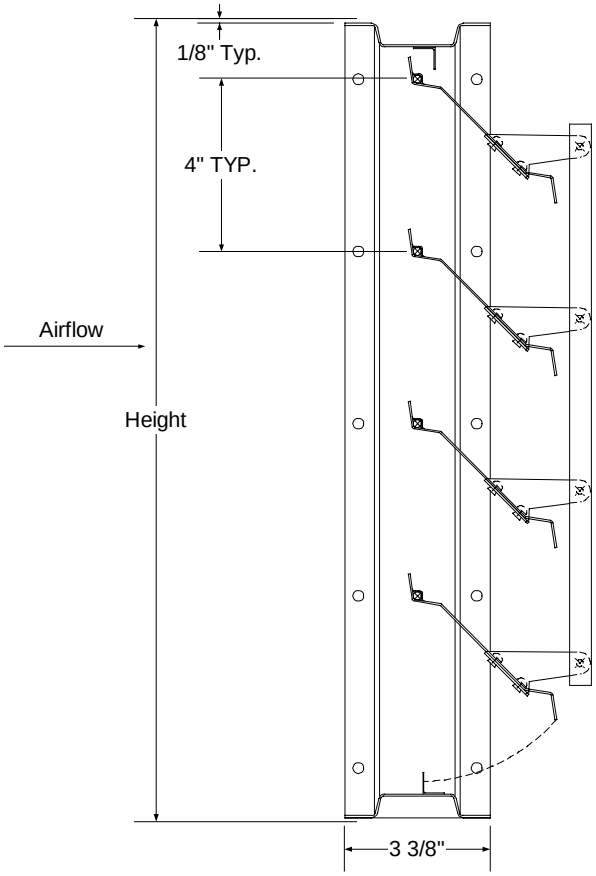

Options

-Flanged frame.
-Sleeves.
-Other options are available, consult factory.

Notes

1. Width x height are nominal opening dimensions. Unless specified otherwise, units will be constructed 1/4” undersize.
2. Metal Form reserves the right to improve design or change specifications at any time.

Tag	Qty.	Width	Height	No. of Panels (W x H)	Options	Finishes/Specify	Remarks

Project: _____
Architect: _____
Engineer: _____
Contractor: _____

©1998 Metal Form Manufacturing Co., Inc.
Form No. S-4298